GENERAL NOTES:

1. GRAVITY LINES – IN ALL INSTALLATIONS, SEWAGE SHALL FLOW BY GRAVITY TO THE HOLDING TANK.
2. INSTALL GRAVITY LINES IN ACCORDANCE WITH LOCAL CODES.

CONSTRUCTION NOTES:

A. 45° ELL.

B. WYE IN VERTICAL POSITION.

C. VACUUM SEWER MAIN

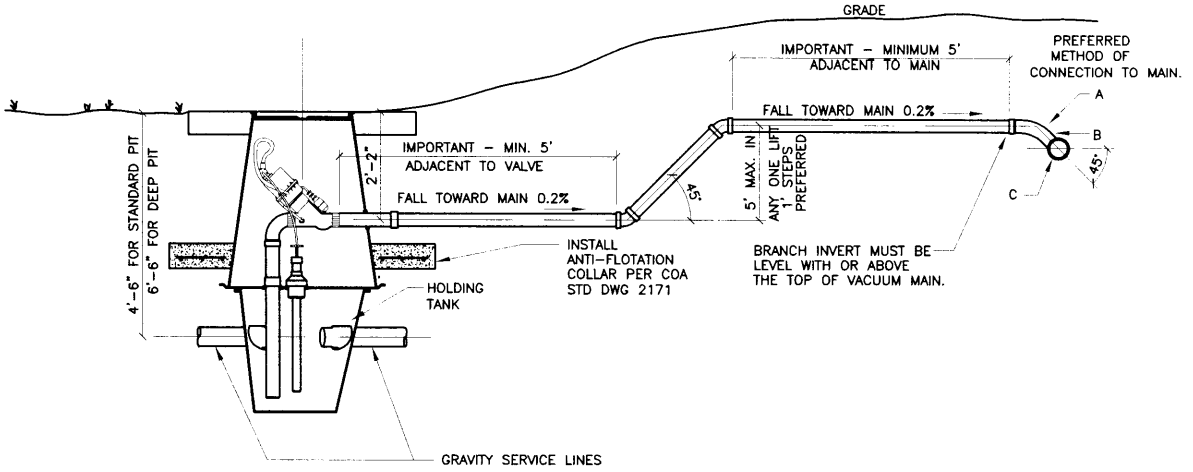

REVISIONS	NM APWA
	VACUUM SEWER STANDARDS VALVE AND PIT INSTALLATION WITH LIFT IN VACUUM SERVICE LATERAL DWG. 2163 FEB. 2006