




TYPICAL ARTERIAL OR COLLECTOR STREET SECTION WITHOUT MEDIAN

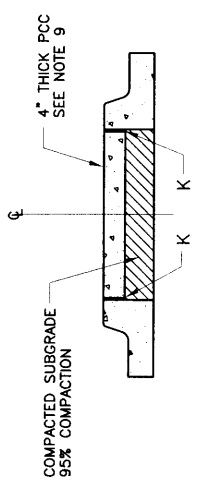


CONCRETE MEDIAN PAVING SECTION (WIDTH VARIES)



BITUMINOUS MEDIAN PAVING SECTION (WIDTH VARIES)

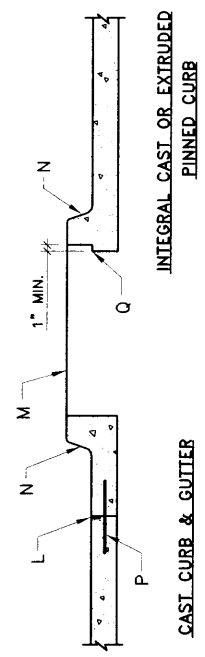

CAST CURB & GUTTER



CAST INTEGRAL MEDIAN WHERE x > 4 FT

GENERAL NOTES:

1. STRUCTURAL THICKNESS OR PAVEMENT COMPONENTS WILL BE PER PAVEMENT DESIGN.
2. ALL SUBGRADE COMPACTION FOR C & G SHALL EXTEND 12" MIN ON EITHER SIDE OF C & G OR CURB SECTION.
3. SUBGRADE PREPARATION UNDER SIDEWALK AND DRIVE PADS SHALL BE INCLUDED WITH THE PARTICULAR ITEM.
4. FINISH GRADE AT PROPERTY LINE SHALL BE BASED ON A MIN 2% SLOPE FROM TOP OF CURB.
5. SLOPE EASEMENT REQUIREMENTS WILL BE SHOWN ON PROJECT CONSTRUCTION PLANS.
6. TRANSVERSE SLOPE FOR PAVEMENT SHALL BE 2% TYPICAL.
7. PAVEMENT FINISH GRADES AND ELEVATIONS SHALL BE MET BY ASPHALT CONCRETE (AC) SURFACE COURSE.
8. PLANT MIX SEAL SHALL BE PLACES ABOVE THE TOE OF THE GUTTER.
9. PORTLAND CEMENT CONCRETE (PCC) MEDIAN PAVEMENT SHALL BE TEXTURED CONCRETE RUNNING BOND PATTERN TRANSVERSE TO CENTERLINE COLOR AS SPECIFIED.
10. SEE STANDARD DWG. 2407 FOR ARTERIAL/COLLECTOR, FLEXIBLE OR RIGID PAVEMENT SECTION.

CONSTRUCTION NOTES:

- A. ASPHALT CONCRETE (AC) SURFACE COURSE.
- B. ASPHALT CONCRETE (AC) PAVEMENT.
- C. COMPACTED BASE.
- D. COMPACTED SUBGRADE, 95% MIN.
- E. CURB & GUTTER MEDIAN.
- F. CURB & GUTTER STANDARD.
- G. SIDEWALK ADJACENT TO CURB (NON-STANDARD, VARIANCE REQUIRED).
- H. SIDEWALK AT STANDARD SETBACK.
- J. MEDIAN.
- K. 1/2" EXPANSION JOINT MATERIAL.
- L. SAW & SEAL JOINT PER STD. DETAIL.
- M. TYPICAL MEDIAN PAVING (SEE DETAIL).
- N. SEAL JOINT TO TOP OF CURB.
- P. #4 X 30" TIE BAR @ 2'-0" O.C. EXTENSION NOT REQUIRED AT INTEGRAL.
- Q. EXTENSION NOT REQUIRED AT INTEGRAL CAST CURB.

REVISIONS	NM APWA
9/91	PAVING
12/15/92	ART./COLL. ST. SECTIONS
8/29/94	WITH MEDIAN
DWG. 2408	FEB. 2006