


GENERAL NOTES:


1. FLOWLINE AND I.C. ELEV. TO BE GIVEN AT QUARTERPOINTS FROM CURB RETURN "A" TO CURB RETURN "B" IN THE CLOCKWISE DIRECTION.
2. INV. OF VALLEY GUTTER TO EXTEND FROM FLOWLINE OF UPSTREAM CURB RETURN TO FLOWLINE OF DOWNSTREAM CURB RETURN.
3. ENTIRE VALLEY GUTTER TO BE REINFORCED WITH 6" X 6" NO. 6 GA. WIRE MESH.
4. — — — DENOTES 1/2" PREMOLED BIT. EXPANSION JT.

CONSTRUCTION NOTES:


- A. EXPANSION JOINT (MAX. 18 FT. O.C.).
- B. VALLEY GUTTER.
- C. FLOWLINE.
- D. MONOLITHIC CONSTRUCTION (INCLUDING CURB).
- E. CURB RETURN "B".
- F. CURB RETURN "A".
- G. 6"X6" NO. 6 GA. WIRE MESH.
- H. SLOPE PAVING TO VALLEY GUTTER.
- J. GUTTER WILL BE DEPRESSED FROM POINT 1 TO POINT 2.

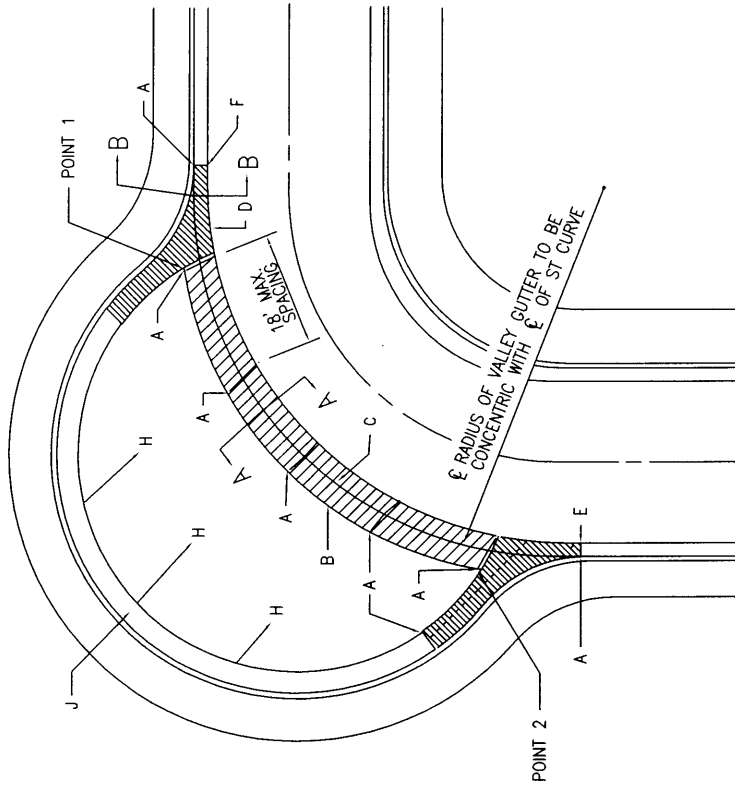

PLAN
CUL-DE-SAC

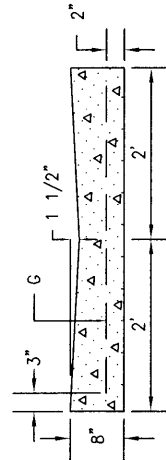

SECTION A-A

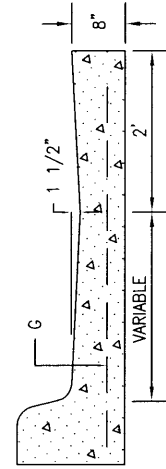

SECTION B-B

REVISIONS

NM APWA

PAVING
CONCRETE VALLEY GUTTER

DWG. 2421

AUG. 1986