

GENERAL NOTES:


1. THICKNESS OF SLAB SHALL BE AS INDICATED ON DRAWINGS.

JOINT DIMENSIONS


D	a	b	c	d	e	f	g
5"	1"	1 3/4"	1 1/2"	1"	2"	min. 1/4"	1/20
6"	1"	2 1/4"	1 1/2"	1"	2 1/2"	1/4"	1/40
8"	1"	3"	2"	1 1/2"	3 1/4"	1/4"	1/20

CONSTRUCTION NOTES:


- A. JOINT FILLER, INSTALL PER MANF. INSTR.
- B. NO.4 DEFORMED BARS, 3'-0" LONG AT 2'-0" O.C.
- C. NO.4 DEFORMED BARS, 3'-0" LONG AT 5'-0" O.C.
- D. THICKNESS OF SLAB.

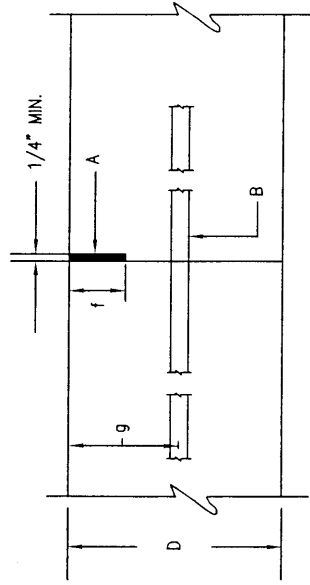


TYPE 2  
CONSTRUCTION JOINT  
(TRANSVERSE)

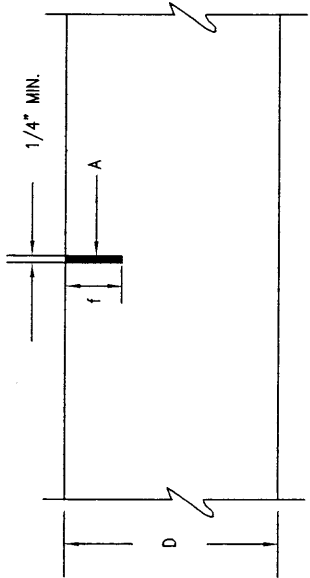

TYPE 1  
SAWED JOINT  
(LONGITUDINAL OR TRANSVERSE)

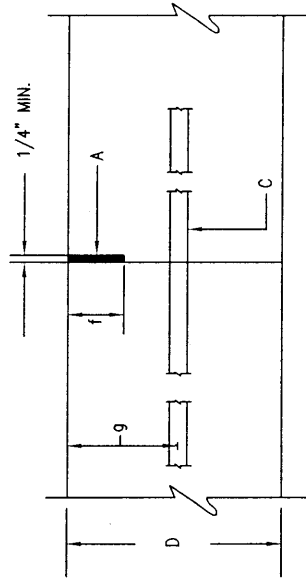

TYPE 3 ALTERNATE  
CONSTRUCTION JOINT  
(LONGITUDINAL)

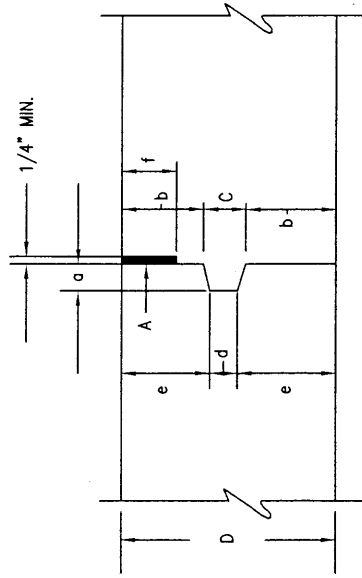

TYPE 3  
CONSTRUCTION JOINT  
(LONGITUDINAL)

REVISIONS

NM APWA

PAVING  
CONCRETE JOINTS

DWG. 2450

AUG. 1986