



OPTIONAL INSTALLATION

PAVED AREAS

STANDARD INSTALLATION

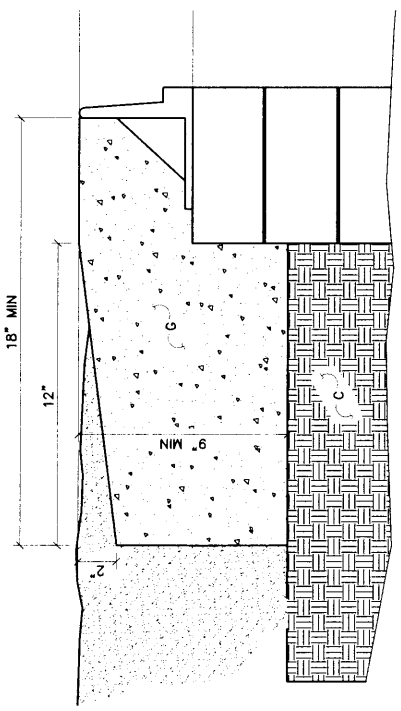

STANDARD INSTALLATION  
DIRT AREAS

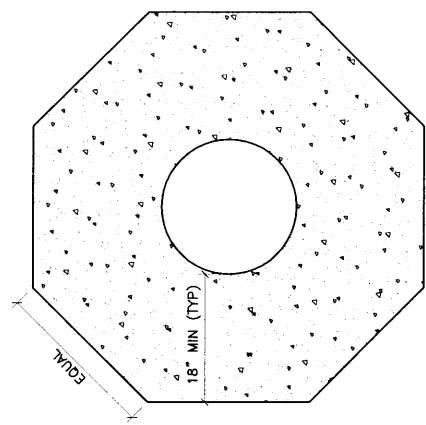

TOP PLAN

**GENERAL NOTES:**

- A MANHOLE OR VALVE BOX RING AND COVER PER CITY STANDARDS.
- B MANHOLE CONE/EXTENSION OR VALVE PIPE PER STANDARDS. PIPE WITH SMOOTH INTERIOR.
- C 12" SUBGRADE, 95% COMPACTION (ASTM).
- D PAVING SECTION PER APPROVED DRAWINGS.
- E CONCRETE COLLAR IN PAVED AREAS - TYPICAL INSTALLATION.
- F CONCRETE COLLAR IN PAVED AREAS WITH ASPHALT CAP. TO BE USED WHEN CALLED FOR ON PLANS OR AS DIRECTED BY THE ENGINEER.
- G CONCRETE COLLAR IN DIRT AREAS - SET RING 1" ABOVE GRADE AND SLOPE CONCRETE DOWN AS SHOWN TO 1" BELOW GRADE.
- H WATER VALVE INSTALLATIONS SHALL HAVE SURFACE STAMPED WITH LINE INFORMATION PER STANDARD DWG 2326.

REVISIONS	NM APWA MANHOLE/VALVE CONCRETE COLLAR DETAIL
DWG. 2461	FEB. 2006