

GENERAL NOTES:


1. ALL DIMENSIONS ARE FROM FLOW LINE TO FLOW LINE.

CONSTRUCTION NOTES:


- A. VARIES, SEE PLANS.
- B. 150' R REVERSE CURVE.
- C. FOR CURB RETURN RADII SEE TABLE 23.3 CHAPTER 23, DEVEL. PROC MANUAL.
- D. RIGHT-OF-WAY LINE.
- E. BEGIN TRANSITION.
- F. END TRANSITION.
- G. 16' OR AS SPECIFIED ON THE PLANS.
- H. 16'-18' OR AS SPECIFIED ON THE PLANS.
- I. INSTALL 4" DIAMETER PVC SLEEVE THRU MEDIAN PAVING: 10' BACK OF NOSE CENTERED IN MEDIAN FOR SIGN POSTS BY OTHERS.
- J.

CURVE DATA

R	Δ	T	L
150'	16° 15' 37"	21.43'	42.57'

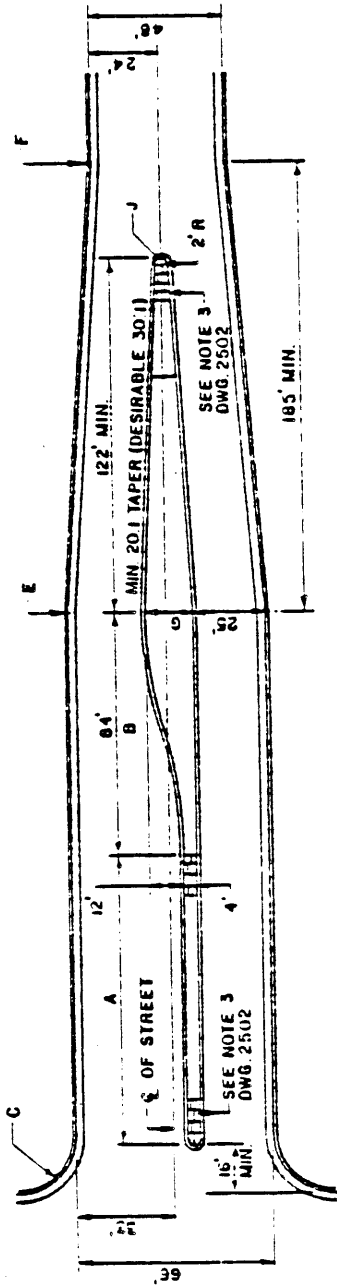

STANDARD TRANSITION FROM 48' TO 66'
(WITH CHANNELIZATION)

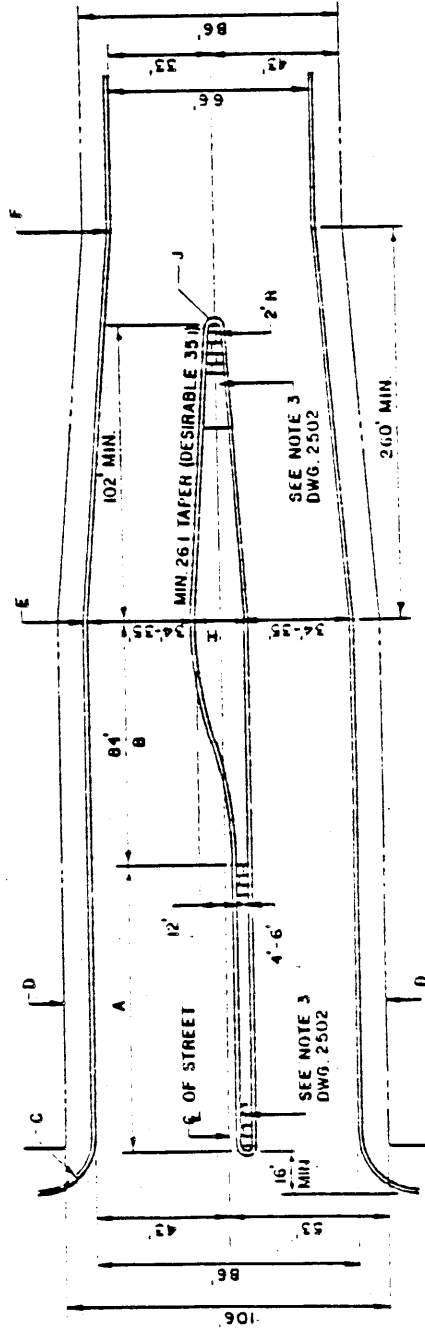

STANDARD TRANSITION FROM 66' TO 86'
(WITH CHANNELIZATION)

NM APWA

TRAFFIC
STANDARD TRANSITION

DWG. 2501

AUG 1906

REVISIONS