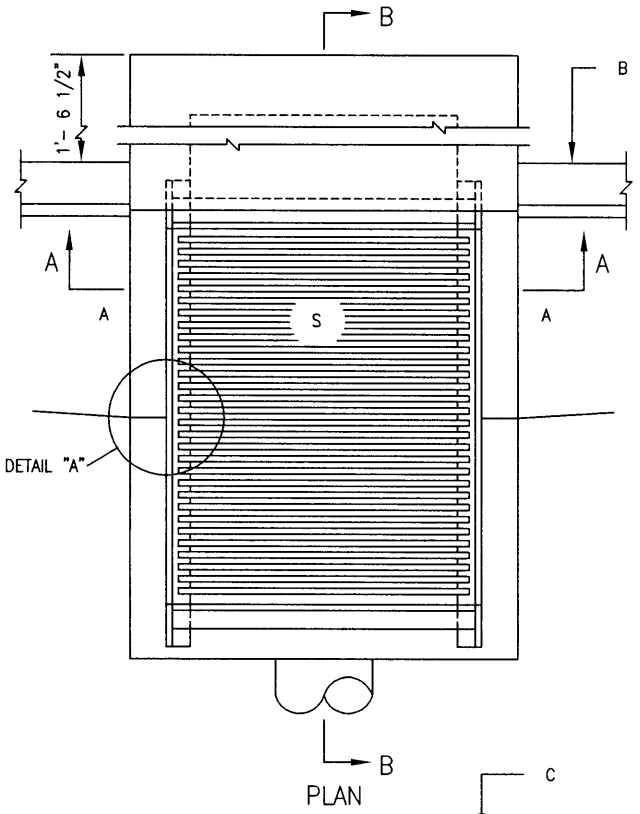

PLAN

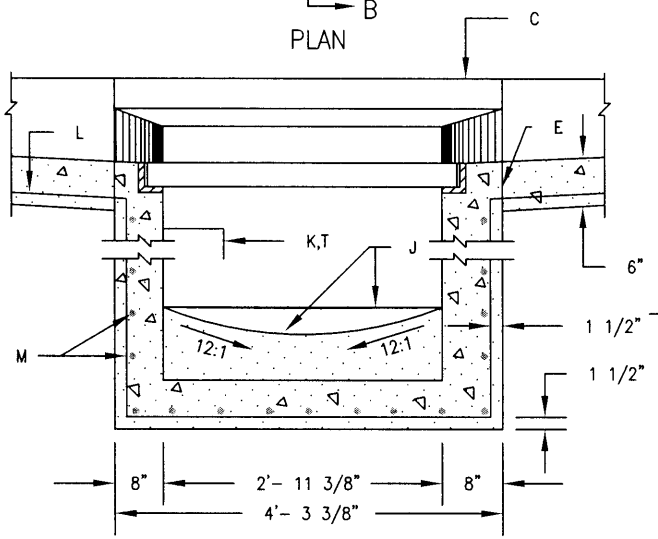

SECTION A-A



DETAIL "A"



DETAIL "B"

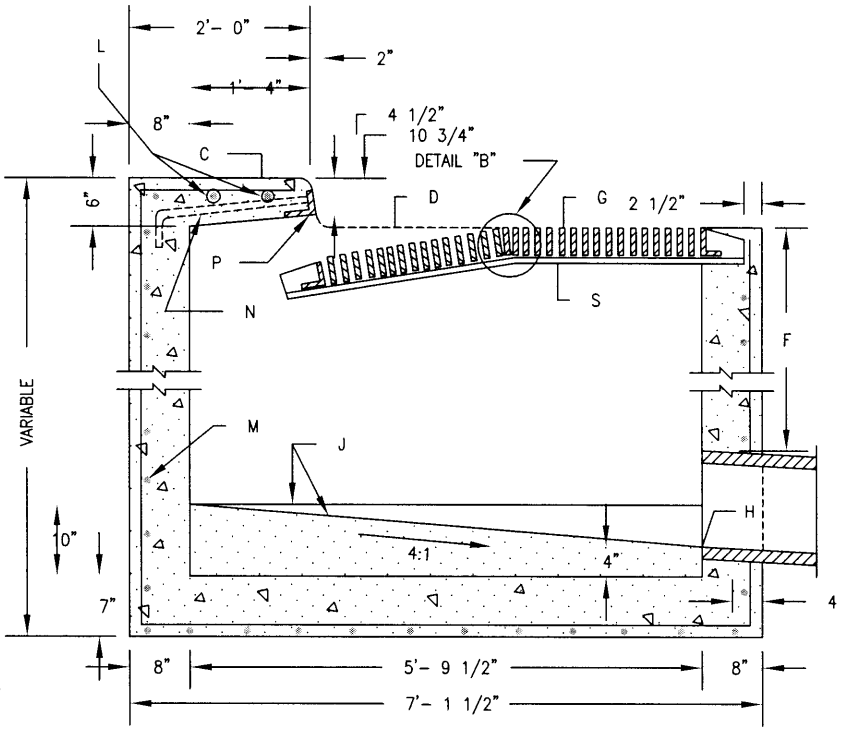

SECTION B-B

GENERAL NOTES:

1. FOR STORM INLET GUTTER TRANSITION, SEE DWG. 2207.
2. OUTLET PIPE SIZE, PER DESIGN REQUIREMENT.
3. FOR FRAME & GRATING, SEE DWG. 2216, 2220 & 2221.
4. FOR ANCHOR DETAIL, SEE DWG. 2205.

CONSTRUCTION NOTES:

A. GUTTER TRANSITION.
B. BACK OF CURB.
C. TOP OF CURB.
D. NORMAL GUTTER LINE.
E. CONSTRUCTION JOINT.
F. 1'- 10" MIN. UNLESS OTHERWISE DIRECTED.
G. SLOPE GRATE TO PAVEMENT GRADE.
H. INVERT PER DESIGN.
J. CONCRETE FILL, MIN. SLOPES AS SHOWN.
K. FOR STORM INLET DEPTHS GREATER THAN 4' INSTALL STD. STEPS, SEE DWG. 2229.
L. EXTEND NO. 4 REBARS 18" INTO CURB ON EACH SIDE OF STORM INLET.
M. NO. 4 BARS AT 6" O. C.
N. ANCHOR.
P. 3 1/2" X 3 1/2" X 1/2" X 4'- 4".
Q. 3 1/2" X 1/2" X 3'- 4 3/8".
R. 4" X 3" X 1/2" X 5'- 2".
S. FRAME AND GRATE.
T. STEPS ON UPSTREAM FACE.

NM APWA

REVISIONS

DRAINAGE
STORM INLET TYPE "B"
DWG. 2203

FEB. 2006